


Threaded Caps

Protects threaded components from dust, moisture and damage during production, storage and transportation

prompt

MADE-TO-ORDER
VOLUME

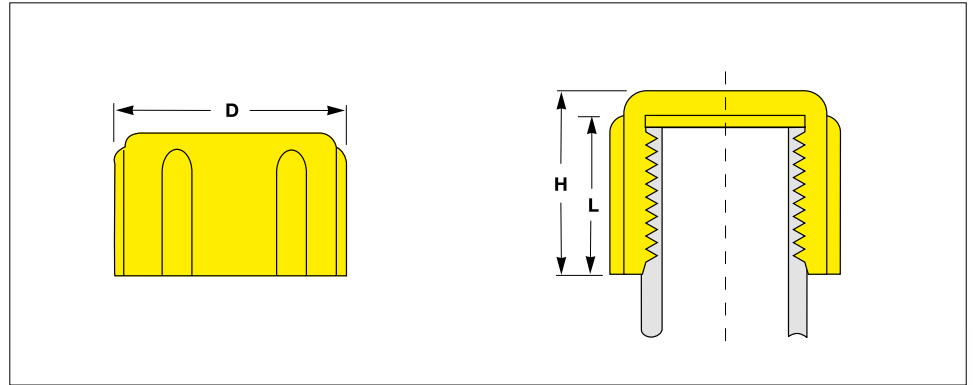

Pipe thread DIN ISO 6149-1

All dimensions in mm

Thread Size	D	L	H	Reference No.
G 1/8	12.9	8.5	9.6	EP 510 – G .1/8"
G 1/4	16.3	10.3	11.3	EP 510 – G .1/4"
G 3/8	20.5	13.1	14.1	EP 510 – G .3/8"
G 1/2	24.8	14.0	15.4	EP 510 – G .1/2"
G 5/8	28.0	14.0	15.2	EP 510 – G .5/8"
G 3/4	30.5	15.1	16.5	EP 510 – G .3/4"
G 1	39.0	18.0	19.5	EP 510 – G 1."
G 1 1/4	47.0	15.8	17.3	EP 510 – G 1.1/4"
G 1 1/2	56.5	16.7	18.7	EP 510 – G 1.1/2"
G 2	65.0	18.6	20.1	EP 510 – G 2."

Metric DIN 3852-1

All dimensions in mm

M 8 × 1	12.0	11.0	12.0	EP 510 – M 8 × 1
M 10 × 1	14.2	12.9	14.2	EP 510 – M 10 × 1
M 12 × 1	16.4	12.7	14.2	EP 510 – M 12 × 1
M 12 × 1.5	16.4	12.7	14.2	EP 510 – M 12 × 1.5
M 14 × 1.5	18.2	12.8	14.1	EP 510 – M 14 × 1.5
M 16 × 1.5	20.0	12.8	14.2	EP 510 – M 16 × 1.5
M 18 × 1.5	22.0	13.8	15.2	EP 510 – M 18 × 1.5
M 20 × 1.5	24.2	14.6	16.1	EP 510 – M 20 × 1.5
M 22 × 1.5	25.9	15.0	16.0	EP 510 – M 22 × 1.5
M 24 × 1.5	28.6	14.7	16.2	EP 510 – M 24 × 1.5
M 26 × 1.5	30.8	13.5	15.3	EP 510 – M 26 × 1.5
M 27 × 2	32.0	13.5	15.3	EP 510 – M 27 × 2
M 30 × 1.5	35.0	14.5	16.3	EP 510 – M 30 × 1.5
M 30 × 2	35.0	14.5	16.2	EP 510 – M 30 × 2
M 36 × 1.5	42.0	16.8	18.6	EP 510 – M 36 × 1.5
M 36 × 2	42.0	16.8	18.6	EP 510 – M 36 × 2
M 42 × 2	50.0	15.7	17.7	EP 510 – M 42 × 2
M 45 × 1.5	51.0	18.7	20.3	EP 510 – M 45 × 1.5
M 45 × 2	51.0	18.7	20.3	EP 510 – M 45 × 2
M 52 × 2	59.0	19.0	20.5	EP 510 – M 52 × 2

Material :
LD-PE,
low density polyethylene

Standard Colour :
yellow, red

Protects threaded components from dust, moisture and damage during production, storage and transportation

Think Plastic. Go Protec.®

PROTEC
PLASTICS

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Threaded Caps

Protects threaded components from dust, moisture and damage during production, storage and transportation

TRIPLE ADVANTAGE of PROTEC CAPTOP®

QUALITY. Used throughout the automotive, fluid power and engineering industries. Protects threaded components from dust, moisture and damage during production, storage and transportation.

AVAILABILITY. With over 400 million moulded components shipped from our UK logistics center we provide the fastest on time delivery service to all industries of the UK market.

PHILOSOPHY. Innovative protective closures at the best price in the market.



UNF – UN / ISO 11926

All dimensions in mm

Thread Size	D	L	H	Reference No.
UN 3/ 8 – 24	13.6	11.3	12.5	EP 510 – . 3/ 8" – 24 UN
UN 7/16 – 20	15.6	11.9	13.3	EP 510 – . 7/16" – 20 UN
UN 1/ 2 – 20	17.0	14.1	15.3	EP 510 – . 1/ 2" – 20 UN
UN 9/16 – 18	18.7	12.5	13.9	EP 510 – . 9/16" – 18 UN
UN 5/ 8 – 18	20.3	18.0	19.4	EP 510 – . 5/ 8" – 18 UN
UN 3/ 4 – 16	23.6	17.6	19.2	EP 510 – . 3/ 4" – 16 UN
UN 11/16 – 16	21.2	10.5	11.8	EP 510 – .11/16" – 16 UN
UN 13/16 – 16	24.7	15.0	16.4	EP 510 – .13/16" – 16 UN
UN 7/ 8 – 14	27.0	19.5	21.2	EP 510 – . 7/ 8" – 14 UN
UN 1 – 14	30.0	16.1	17.3	EP 510 – 1. " – 14 UN
UN 1 1/16 – 12	31.7	20.1	21.7	EP 510 – 1. 1/16" – 12 UN
UN 1 3/16 – 12	35.0	21.1	22.7	EP 510 – 1. 3/16" – 12 UN
UN 1 5/16 – 12	39.3	21.1	22.9	EP 510 – 1. 5/16" – 12 UN
UN 1 7/16 – 12	44.0	21.0	22.8	EP 510 – 1. 7/16" – 12 UN

Should your requirements not be shown please ask for a separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.



New Sizes

M 8 × 1.25
M 10 × 1.5
M 12 × 1.75
M 14 × 2.0
M 16 × 2.5
M 18 × 2.0
M 24 × 2.0
M 27 × 1.5
M 28 × 1.5
M 33 × 1.5
M 33 × 2.0
M 48 × 2.0
1. 5/8 12 -UNF
1. 7/8 12 -UNF
2. 1/2 12 -UNF

Material :
LD-PE,
low density polyethylene

Standard Colour :
yellow, red

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

**PROTEC
PLASTICS**