


# PROTEC PROSICON® EPS 135

## High Temp Masking Tapered Silicone Pull Plugs

PROTEC  
PLASTICS

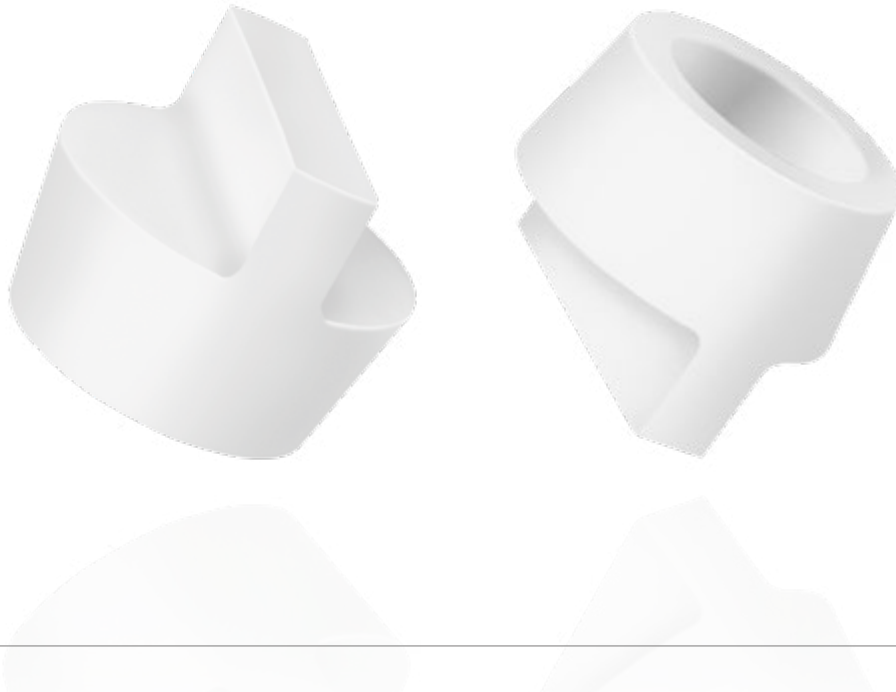

**YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.**

### HIGH TEMP MASKING TAPERED SILICONE PULL PLUGS.

For pipes, bore holes and internal threads. Conical shaft, without collar, lightweight construction with hollow core and centre pull tab. Recommended for Powder coating, e-coating, plating & anodizing.

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

### PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

### COLOR OPTIONS.

Natural. Also available in colour coding.

### TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality

**HEAT RESISTANT!**

### MATERIALS SELECTION GUIDE.

EPDM rubber, Neoprene, NBR rubber, SBR, TPE, ecc.

### APPLICATION.

High Temperature Masking Caps and Plugs to protect your product during finishing processes like powder coating, KTL, Wet painting, anodizing, electroplating and e.coating treatments. Extremely temperature resistant up to 316° C, robust, versatile and time-saving in application.


### SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

We develop your individual parts that are not listed or alternative dimensional designs of this range that are tailored to your requirements.

<b>Customized.</b>	For your special application
<b>Time Saver.</b>	Rapid Prototyping & Hi-Speed functional samples
<b>Hi-Speed.</b>	Fast Lane Serial Mold Construction
<b>Unbeatable.</b>	At the best price in the market

# PROTEC PROSICON® EPS 135

## High Temp Masking Tapered Silicone Pull Plugs

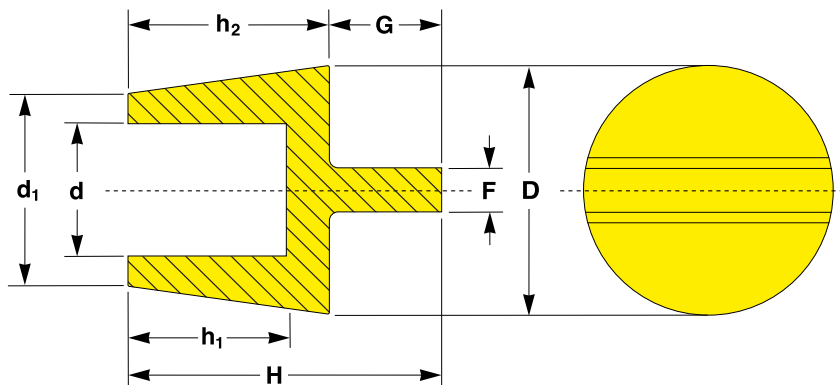

### DIMENSIONS

All dimensions in mm

Dimensions								Standard Pack	Reference No.
d <sub>1</sub>	d	D	h <sub>1</sub>	h <sub>2</sub>	H	G	F		
23.01	10.31	27.00	19.05	25.40	19.00	19.05	10.21	100	EPS 135 / 1063-H
26.19	13.49	31.75	19.05	25.40	25.52	19.05	10.70	100	EPS 135 / 1250-H
30.15	17.45	36.50	19.05	25.40	31.20	19.05	10.70	50	EPS 135 / 1437-H
41.28	28.58	50.01	19.05	25.40	49.10	19.05	10.70	25	EPS 135 / 1969-H
47.63	34.93	55.96	19.05	25.40	57.80	19.05	10.70	25	EPS 135 / 2203-H

Should your requirements not be shown please ask for a separate quotation.  
 PROTEC products and specifications are subject to improvement and change without notice.